

BERJAYA®

Quality Variety Reliability



QUALITY COMMERCIAL REFRIGERATOR

Refrigerator Manufacturer & Exporter

2023
EDITION

ABOUT US



MALAYSIA EXPORTER & MANUFACTURER

Commercial Refrigerator & Commercial Foodservice Equipment



ONE STOP SOLUTION

Founded in 1980, Berjaya Steel Product Sdn. Bhd. has become a major manufacturer providing One Stop Solution for quality commercial foodservice equipment and commercial refrigerators.

We position ourselves as a business partner for every client's success by providing one-stop solutions including technical support, professional customer services, a wide range of quality commercial foodservice equipment and commercial refrigerators.

Whatever you need, Berjaya Steel Product Sdn. Bhd. has it all and cater to your professional requirement.



CUSTOMER SATISFACTION

Berjaya Steel Product Sdn. Bhd. is committed towards total customer satisfactions by ensuring that only quality products and good services are delivered to customers.

The company believes in providing complete and comprehensive solution to meet kitchen and refrigerators requirements in the food service industry. By maintaining consistent quality, BERJAYA is currently in the global market exporting to many countries all over the world.



EXCELLENT IN QUALITY

In the pursuit of excellence, Berjaya Steel Product Sdn. Bhd. has committed its management system to the ISO 9001:2015 certification.

Berjaya refrigerators are in compliance with Europe Standard (CE) with RoHS certification and approved by GEMS Australia. We offer a total refrigeration solution with a wide selection of commercial refrigerators. We produced quality and reliable products that are trusted by our customers. Therefore, our company aspires to continuously improve by achieving outstanding customer satisfaction through working closely with leading international components manufacturers and keep developing new innovative products to optimise cutting-edge refrigeration technology to the market.



CONTINUOUS IMPROVEMENT

Quality, Variety & Reliability are our company's pillars of success. As a commercial refrigerators manufacturer, we adhere to the highest standard of social, employment and environmental practice.

BERJAYA is always conscious of the environmental well-being and constantly strives to improve energy efficiency without compromising performance.

Sales & Marketing Office
In Kuala Lumpur, Malaysia



12

acres factory



20

product lines



over

800

well-trained
employees nationwide



exporting to over

60

countries



Manufacturing Plant In Negeri Sembilan, Malaysia

CERTIFICATE

Comply With International Safety Standard



FEATURES *(Chiller & Freezer)*

Chiller



High Efficient Condenser Unit

Environmentally Friendly Refrigerant R134a for Chiller and R404a for freezer (CFC and HCFC Free).



Refrigeration System

Protected from corrossions by urethane evaporator coil.



Digital Adjustable

Temperature control. Temperatures are shown at the display of controller.

Freezer



Ventilated System

(assisted with fan) Will ensure homogeneous coolness in the storage space.



Epoxy Coated Shelves

Are hard, strong and easy to clean. Tested -35°C durability.



The Arc Angular Design

On the base plate complies with the requirements of sanitation requirement.

Product Temperature Reference :

PRODUCT	TEMPERATURE	DURATION (DAY)	HUMIDITY
Vegetable	6°C ~ 10°C	6	75% - 85%
Can Drinks	4°C ~ 8°C	Durable Days	-
Meat	-10°C ~ -14°C	25	-
Meat	-18°C and below	180	-
Chocolate	14°C ~ 16°C	Durable Days	45% - 50%
Daily Product	0°C ~ 4°C	Durable Days	-

Common Features :

CHILLER	R134a refrigerant (CFC and HCFC free) Test Condition according ASHRAE range - Te: 7.2°C; Tc: 55°C
FREEZER	R404 refrigerant (CFC and HCFC free) Test Condition according ASHRAE range - Te: -23.3°C; Tc: 55°C
INSULATION	60mm thick for Display Chiller, Display Freezer, Upright Chiller, Upright Freezer, Counter Chiller, Counter Freezer, High Density Cyclopentane, Polyurethane Foam (40kg/m ³)(CFC, HCFC and HFC free)

As Product improvement is an on going process, we reserve the right to change specifications or design without notice.

CONTENT

1 DISPLAY RANGE

- 08 Display Chiller
- 09 Display Freezer
- 10 Dual Display Chiller / Freezer
- 11 Display Chiller - E-Series
- 12 Display Freezer - E-Series

2 SHOWCASE RANGE

- 14 Confectionery Showcase - *Colourbond Base*
- 15 Confectionery Showcase - *Stainless Steel Base*
- 16 Rectangular Confectionery Showcase - *Colourbond Base*
- 17 Rectangular Confectionery Showcase - *Stainless Steel Base*
- 18 Rectangular Drawer Showcase
- 19 Gelato Showcase

3 BLAST FREEZER

- 21 Blast Freezer

4 UPRIGHT RANGE

- 23 Upright Chiller
- 24 Upright Freezer
- 25 Dual Upright Chiller / Freezer
- 26 Gastronome Upright Chiller
- 27 Gastronome Upright Freezer

5 COUNTER RANGE

- 29 Counter Chiller
- 30 Counter Freezer
- 31 Dual Counter Chiller/ Freezer
- 32 Pizza Counter
- 33 Salad Sandwich Counter
- 34 2 Deck Drawer Counter Chiller
- 35 3 Deck Drawer Counter Chiller
- 36 Refrigerated Barline - *600 Series / 700 Series*

6 OTHERS RANGE

- 37 Table Top Display Cooler / Mini Display Chiller
- 38 Fish Display Case / Refrigerated Display Case
- 39 Open Showcase

1 DISPLAY RANGE

- Display Chiller
- Display Freezer
- Dual Display Chiller / Freezer
- Display Chiller - E-Series
- Display Freezer - E-Series



DISPLAY CHILLER

Double layer heated glass, frost free • Tested at ambient temperature of 32°C



1D/DC-SM





2D/DC-SM






3D/DC-SM

Top View



Front View



1 Door

2 Door

3 Door

MODEL	1D/DC-SM	2D/DC-SM	3D/DC-SM
Temperature °C (celcius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	635 x (710 + 20) x 2060	1260 x (710 + 20) x 2060	1880 x (710 + 20) x 2060
Gross Volume (Litres)	400	876	1351
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	839	1144	1694
Wattage (W)	365 - 404	599 - 662	895 - 989
Ampere (A)	2.3 - 2.6	3.3 - 3.7	4.8 - 5.3
Energy Consumption (kw/24h)	5.6 - 6.2	11.4 - 12.6	20.7 - 22.9
Refrigerant	R134a	R134a	R134a
PVC Coated Shelving	5	10	15
Auto Door Lock	Yes	Yes	Yes
Weight (kg)	95	157	209
Unit for 20ft Container	24	12	9
Unit for 40ft Container	51	27	18

Note:
Colour of Door Frame : SM - Silver Matt Aluminium Frame

DISPLAY FREEZER

Triple layer heated glass, frost free • Tested at ambient temperature of 32°C



1D/DF-SM-EV





2D/DF-SM-EV






3D/DF-SM-EV

Top View



Front View



1 Door

2 Door

3 Door

MODEL	1D/DF-SM-EV	2D/DF-SM-EV	3D/DF-SM-EV
Temperature °C (celcius)	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	635 x (710 + 20) x 2060	1260 x (710 + 20) x 2060	1880 x (710 + 20) x 2060
Gross Volume (Litres)	400	976	1351
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	772	1112	1526
Wattage (W)	856 - 946	1412 - 1561	1849 - 2043
Ampere (A)	3.9 - 4.3	6.2 - 6.9	8.6 - 9.5
Energy Consumption (kw/24h)	18.7 - 20.7	31.2 - 34.5	44.9 - 49.6
Refrigerant	R404a	R404a	R404a
PVC Coated Shelving	5	10	15
Auto Door Lock	Yes	Yes	Yes
Weight (kg)	113	199	279
Unit for 20ft Container	24	12	9
Unit for 40ft Container	51	27	18

Note:
Colour of Door Frame : SM - Silver Matt Aluminium Frame

DUAL DISPLAY CHILLER / FREEZER

Triple layer heated glass, frost free • Tested at ambient temperature of 32°C



2D/DCF-SM






3D/D2C1F-SM





3D/D2F1C-SM

Top View



Front View



2 Door

3 Door

3 Door

MODEL		2D/DCF-SM	3D/D2C1F-SM	3D/D2F1C-SM
Temperature °C (celcius)	- Chiller - Freezer	+1 to +6 -20 to -14	+1 to +6 -20 to -14	+1 to +6 -20 to -14
External Dimension (mm)		1260 x (710 + 20) x 2060	1880 x (710 + 20) x 2060	1880 x (710 + 20) x 2060
Gross Volume (Litres)	- Chiller - Freezer	432 403	977 459	459 977
Voltage/Frequency (V/Hz)		230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	- Chiller - Freezer	522 772	792 772	522 1112
Wattage (W)		665 - 735	1045 - 1155	1425 - 1575
Ampere (A)	- Chiller - Freezer	4.3 - 4.7 4.5 - 4.9	4.5 - 4.9 5.3 - 5.9	4.3 - 4.7 7.6 - 8.4
Energy Consumption (kw/24h)	- Chiller - Freezer	4.5 - 4.9 14.5 - 16.1	6.5 - 7.1 14.5 - 16.1	4.5 - 4.9 20.4 - 22.6
Refrigerant	- Chiller - Freezer	R134a R404a	R134a R404a	R134a R404a
PVC Coated Shelving		10	15	15
Auto Door Lock		Yes	Yes	Yes
Weight (kg)		180	230	290
Unit for 20ft Container		12	9	9
Unit for 40ft Container		27	18	18

Note:
Colour of Door Frame : SM - Silver Matt Aluminium Frame

DISPLAY CHILLER - E-SERIES

Double layer heated glass, frost free • Tested at ambient temperature of 32°C



1D/DC-BBH-1






2D/DC-BBH-1





3D/DC-BBH-1

Top View



Front View



1 Door

2 Door

3 Door

MODEL	1D/DC-BBH-1	2D/DC-BBH-1	3D/DC-BBH-1
Temperature °C (celcius)	+2 to +8	+2 to +8	+2 to +8
External Dimension (mm)	635 x (710 + 20) x 2060	1260 x (710 + 20) x 2060	1880 x (710 + 20) x 2060
Gross Volume (Litres)	400	876	1351
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	839	1040	1369
Wattage (W)	398 - 440	520 - 575	770 - 851
Ampere (A)	2.4 - 2.6	3.0 - 3.3	3.6 - 4.0
Refrigerant	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
PVC Coated Sheving	5	10	15
Auto Door Lock	No	No	No
Weight (kg)	97	153	215
Unit for 20ft Container	24	12	9
Unit for 40ft Container	51	27	18

DISPLAY FREEZER - E-SERIES

Double layer heated glass, frost free • Tested at ambient temperature of 32°C



1D/DF-BBH





2D/DF-BBH





3D/DF-BBH

Top View



Front View



1 Door

2 Door

3 Door

MODEL	1D/DF-BBH	2D/DF-BBH	3D/DF-BBH
Temperature °C (celcius)	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	635 x (710 + 20) x 2060	1260 x (710 + 20) x 2060	1880 x (710 + 20) x 2060
Gross Volume (Litres)	400	876	1351
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	744	1381	2072
Wattage (W)	760 - 840	1363 - 1506	1924 - 2126
Ampere (A)	4.3 - 4.7	6.5 - 7.2	9.5 - 10.5
Refrigerant	R404a	R404a	R404a
PVC Coated Sheving	5	10	15
Auto Door Lock	No	No	No
Weight (kg)	113	199	279
Unit for 20ft Container	24	12	9
Unit for 40ft Container	51	27	18

2 SHOWCASE RANGE

- Confectionery Showcase
- Colourbond Base
- Confectionery Showcase
- Stainless Steel Base
- Rectangular Confectionery Showcase
- Colourbond Base
- Rectangular Confectionery Showcase
- Stainless Steel Base
- Rectangular Drawer Showcase
- Gelato Showcase



CONFECTIONERY SHOWCASE

COLOURBOND BASE


Double Curved Glass • Tested at ambient temperature of 32°C



2 Tiers



3 Tiers

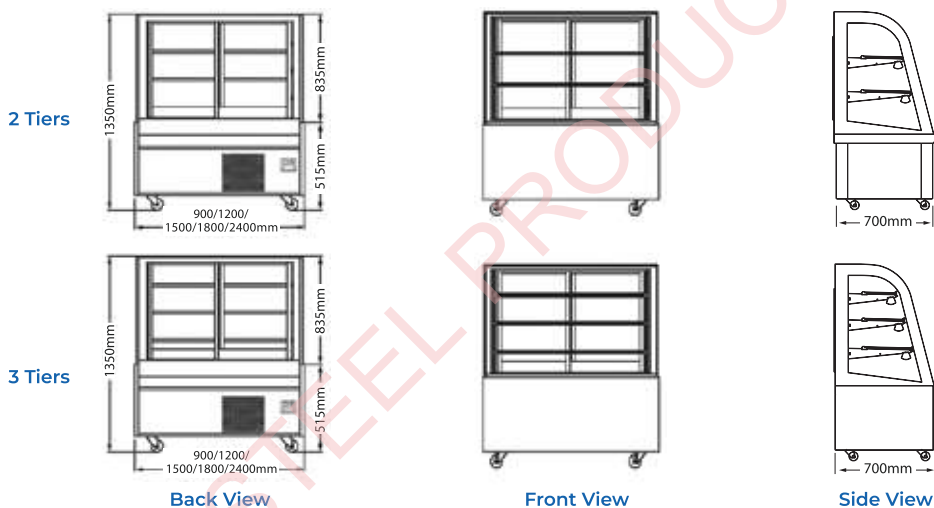

MODEL	- 2 Tiers	CCS 09SB13-2FB	CCS 12SB13-2FB	CCS 15SB13-2FB	CCS 18SB13-2FB	CCS 24SB13-2FB
	- 3 Tiers	CCS 09SB13-3FB	CCS 12SB13-3FB	CCS 15SB13-3FB	CCS 18SB13-3FB	CCS 24SB13-3FB
Temperature°C (celsius)		+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)		900 x 700 x 1350	1200 x 700 x 1350	1500 x 700 x 1350	1800 x 700 x 1350	2400 x 700 x 1350
Gross Volume (L)		316	439	560	682	926
Voltage/ Frequency (V/Hz)		230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity		646	792	1002	1346	1628
Wattage (W)		760 - 840	950 - 1050	1045 - 1155	1330 - 1470	1615 - 1785
Ampere (A)		4.75 - 5.25	5.7 - 6.3	5.7 - 6.3	7.6 - 8.4	9.0 - 10.0
Refrigerant		R134a	R134a	R134a	R134a	R404a
Defrost System		Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Weight (kg)	- 2 Tiers	144	190	236	282	328
	- 3 Tiers	161	202	242	289	334
Unit For 20ft Container		14	11	10	7	4
Unit For 40ft Container		30	24	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

CONFECTIONERY SHOWCASE

STAINLESS STEEL BASE


Double Curved Glass • Tested at ambient temperature of 32°C



2 Tiers



3 Tiers

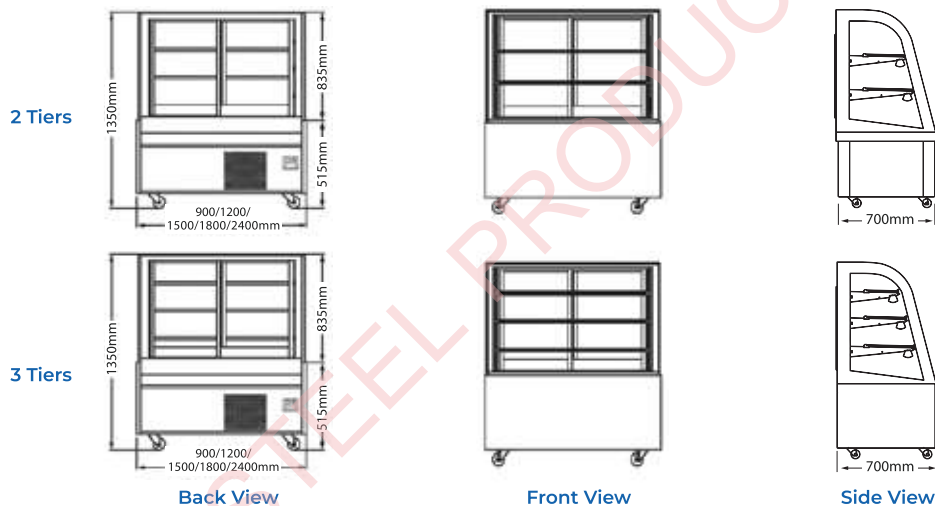

MODEL	- 2 Tiers	CCS-09SS-2	CCS-12SS-2	CCS-15SS-2	CCS-18SS-2	CCS-24SS-2
	- 3 Tiers	CCS-09SS-3	CCS-12SS-3	CCS-15SS-3	CCS-18SS-3	CCS-24SS-3
Temperature°C (celsius)		+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)		900 x 700 x 1350	1200 x 700 x 1350	1500 x 700 x 1350	1800 x 700 x 1350	2400 x 700 x 1350
Gross Volume (Litres)		370	499	628	757	1015
Voltage/ Frequency (V/Hz)		230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity		646	792	1002	1346	1628
Wattage (W)		450 - 600	600 - 700	700 - 800	1000 - 1400	1500 - 1700
Ampere (A)		3.0 - 4.0	3.5 - 4.5	4.5 - 5.5	6.0 - 9.0	8.5 - 9.0
Refrigerant		R134a	R134a	R134a	R134a	R404a
Defrost System		Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Weight (kg)	- 2 Tiers	166	199	235	278	363
	- 3 Tiers	173	208	246	290	380
Unit For 20ft Container		14	11	10	7	4
Unit For 40ft Container		30	24	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

RECTANGULAR CONFECTIONERY SHOWCASE

COLOURBOND BASE


Double Glass • Tested at ambient temperature of 32°C



2 Tiers




3 Tiers

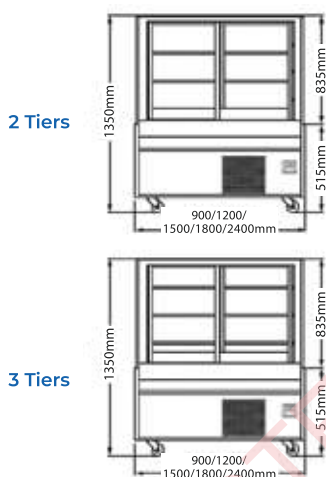


2 Tiers


3 Tiers




Back View

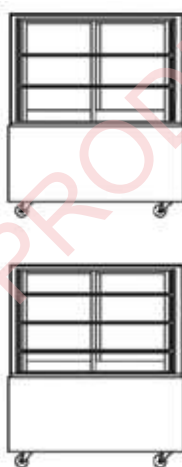

Front View



Side View



MODEL	- 2 Tiers	RCS 09SB13-2FB	RCS 12SB13-2FB	RCS 15SB13-2FB	RCS 18SB13-2FB	RCS 24SB13-2FB
	- 3 Tiers	RCS 09SB13-3FB	RCS 12SB13-3FB	RCS 15SB13-3FB	RCS 18SB13-3FB	RCS 24SB13-3FB
Temperature°C (celsius)	+1 to +6		+1 to +6		+1 to +6	
External Dimension (mm)	900 x 700 x 1350		1200 x 700 x 1350		1500 x 700 x 1350	
Gross Volume (Litres)	316		439		682	
Voltage/ Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz		230V/1/50Hz 220V/1/60Hz		230V/1/50Hz 220V/1/60Hz	
Cooling Capacity	646		913		1346	
Wattage (W)	706 - 780		892 - 986		1180 - 1304	
Ampere (A)	3.7 - 4.1		5.3 - 5.9		6.6 - 7.3	
Refrigerant	R134a		R134a		R134a	
Defrost System	Forced Air Circulation		Forced Air Circulation		Forced Air Circulation	
Weight (kg)	- 2 Tiers	171	212	250	295	380
	- 3 Tiers	175	216	256	300	390
Unit For 20ft Container	14		11		7	
Unit For 40ft Container	30		24		16	

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

RECTANGULAR CONFECTIONERY SHOWCASE

STAINLESS STEEL BASE


Double Glass • Tested at ambient temperature of 32°C



2 Tiers



3 Tiers

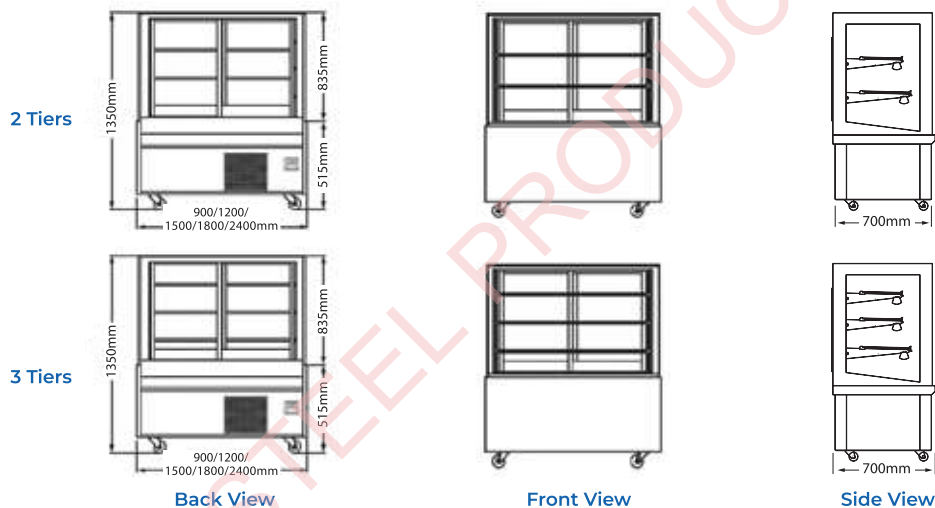

MODEL	- 2 Tiers	RCS-09SS-2	RCS-12SS-2	RCS-15SS-2	RCS-18SS-2	RCS-24SS-2
	- 3 Tiers	RCS-09SS-3	RCS-12SS-3	RCS-15SS-3	RCS-18SS-3	RCS-24SS-3
Temperature°C (celsius)		+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)		900 x 700 x 1350	1200 x 700 x 1350	1500 x 700 x 1350	1800 x 700 x 1350	2400 x 700 x 1350
Gross Volume (Litres)		370	499	628	757	1015
Voltage/ Frequency (V/Hz)		230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity		646	913	1002	1346	1628
Wattage (W)		760 - 840	950 - 1050	1045 - 1155	1330 - 1470	1615 - 1785
Ampere (A)		4.75 - 5.25	5.7 - 6.3	6.3 - 6.9	7.6 - 8.4	9.0 - 10
Refrigerant		R134a	R134a	R134a	R134a	R404a
Defrost System		Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Weight (kg)	- 2 Tiers	182	220	254	302	412
	- 3 Tiers	193	230	267	314	425
Unit For 20ft Container		14	11	10	7	4
Unit For 40ft Container		30	24	22	16	8

Optional: To include key lock, prevents unauthorised access to the stores confectioneries.

RECTANGULAR DRAWER SHOWCASE

Heated glass , Frost Free • LED Light Display • Tested at ambient temperature of 28°C




With Window




Without Window




Back View

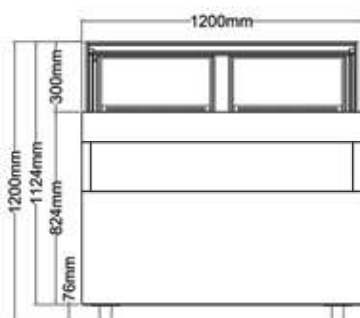

Front View

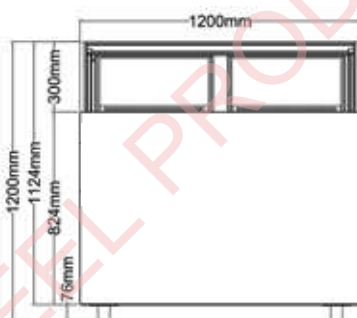

Front View

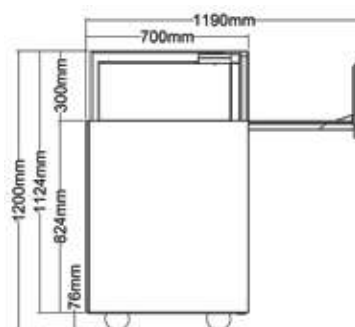

Side View



CONFECTIONERY	WITH WINDOW		WITHOUT WINDOW	
MODEL	RDS-M-12W	RDS-M-15W	RDS-M-12	RDS-M-15
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1200 x 700 x 1200	1500 x 700 x 1200	1200 x 700 x 1200	1500 x 700 x 1200
Gross Volume (Litres)	- Top - Middle	157 195 163	157 195 159	195 203
Voltage/ Frequency (V/Hz)	230 - 240V/50Hz	230 - 240V/50Hz	230 - 240V/50Hz	230 - 240V/50Hz
Cooling Capacity	1784	1788	1784	1788
Wattage (W)	1092.5 - 1207.5	1206 - 1333	1092.5 - 1207.5	1206 - 1333
Ampere (A)	6.0 - 6.6	6.9 - 7.7	6.0 - 6.6	6.9 - 7.7
Refrigerant	R134a	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Weight (kg)	212	250	212	250
Unit For 20ft Container	11	10	11	10
Unit For 40ft Container	23	21	23	21

GELATO SHOWCASE

Tested at ambient temperature of 28°C



White(W)



Grey(G)



Red(R)




Blue(B)







Orange(O)

Front View



Top View



Side View



MODEL	GS08	GS10	GS12
Temperature°C (celsius)	-20 to -25	-20 to -25	-20 to -25
External Dimension (mm)	1350 x 1125 x 1300	1600 x 1125 x 1300	1850 x 1125 x 1300
No Of Pan	8	10	12
Size Of Pan (mm)	360 x 250 x 80 (FP - ICS - 1/2 - 3)	360 x 250 x 80 (FP - ICS - 1/2 - 3)	360 x 250 x 80 (FP - ICS - 1/2 - 3)
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Compressor (Hp)	1 1/2 Hp	1 1/2 Hp	1 Hp x 2
Cooling Capacity (W)	1673	1732	1262 x 2
Wattage (W)	1330 - 1470	1520 - 1680	2166 - 2394
Ampere (A)	5.7 - 6.3	6.6 - 7.4	10.4 - 11.6
System	Force Convection (Ventilated System)	Force Convection (Ventilated System)	Force Convection (Ventilated System)
Refrigerant	R404	R404	R404
Unit For 20ft Container	4 (with wooden case)	4 (with wooden case)	4 (with wooden case)
Unit For 40ft Container	9 (with wooden case)	9 (with wooden case)	9 (with wooden case)

3 BLAST FREEZER

• Blast Freezer

Test ambient temperature 32°C

General Temperature pull down range
+25 °C to -40°C within ≤60 minutes
(vary with model specification)

High power cooling system to keep the quality
of the flavour and regenerate food taste just
as good as non blast chilled food

Exterior & Interior constructed
with AISI 304 Stainless Steel

Food Pan 530 x 325 x 65mm

Intuitive touch control panel - easy to use

Digital Thermostat with temperature display

The device defrosting & evaporation of
condensate without the use of electricity

Self-closing door

Wide round edges
for easy cleaning

CFCS free, R404A refrigerant type

Blast Freezer locks the nutritional value, flavors,
texture and color of the food it preserves

High density insulation with C₅ H₁₀ blowing gas



BLAST FREEZER


Tested at ambient temperature of 32°C with humidity 50 - 60 (RH %)




BF-1100-40




BF-1800-40



Top View



Front View



MODEL	BF-1100-40	BF-1800-40
Temperature °C (celcius)	-40°C ± 3	-40°C ± 3
Exterior Dimension (mm)	800 x 840 x 1100	800 x 840 x 1800
Internal Dimension (mm)	663 x 400 x 430	663 x 400 x 965
Net Volume (L)	114	256
Voltage/Frequency (V/Hz)	230V/1/50Hz	230V/1/50Hz
Energy Consumption (kw/24hr)	23 - 25	33 - 37
Rating Input Power (W)	967 - 1069	1513 - 1673
Ampere (A)	6.3 - 7.0	8.7 - 9.7
Cooling Capacity (W)	1125	2564
Refrigerant	R404a / 1200g	R404a / 2400g
Cooling Type	Ventilated	Ventilated
Defrosting Type	Automatic	Automatic
No. of 1/1 Size Pan (Depth 65mm)	5 Trays	11 Trays
Weight (kg)	140	220

4 UPRIGHT RANGE

- Upright Chiller
- Upright Freezer
- Dual Upright Chiller / Freezer
- Gastronome Upright Chiller
- Gastronome Upright Freezer



UPRIGHT CHILLER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2DUC/Z





BS 4DUC/Z





BS 6DUC/Z

Top View



Front View



2 Door

4 Door

6 Door

MODEL	BS 2DUC/Z	BS 4DUC/Z	BS 6DUC/Z
Temperature °C (celcius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	650 x 770 x 2060	1300 x 770 x 2060	1950 x 770 x 2060
Gross Volume (Litres)	471	1029	1602
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	522	792	913
Wattage (W)	341 - 377	480 - 530	709 - 783
Ampere (A)	2.3 - 2.6	3.1 - 3.4	5.2 - 5.8
Refrigerant	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
PVC Coated Shelving	4	8	12
Weight (kg)	97	147	201
Unit for 20ft Container	23	11	7
Unit for 40ft Container	48	23	15

Note:
Option : CW - Castor Wheel / BF - Bullet Feet

UPRIGHT FREEZER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2DUF/Z






BS 4DUF/Z





BS 6DUF/Z

Top View



Front View



2 Door

4 Door

6 Door

MODEL	BS 2DUF/Z	BS 4DUF/Z	BS 6DUF/Z
Temperature °C (celcius)	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	650 x 770 x 2060	1300 x 770 x 2060	1950 x 770 x 2060
Gross Volume (Litres)	471	1029	1602
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	680	876	1112
Wattage (W)	581 - 642	716 - 791	1238 - 1368
Ampere (A)	3.8 - 4.2	3.4 - 3.7	6.2 - 6.8
Refrigerant	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	4	8	12
Weight (kg)	102	165	228
Unit for 20ft Container	23	11	7
Unit for 40ft Container	48	23	15

Note:
Option : CW - Castor Wheel / BF - Bullet Feet

DUAL UPRIGHT CHILLER / FREEZER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS DU2F2C/Z






BS DU4C2F/Z





BS DU4F2C/Z

Top View



Front View



4 Door

6 Door

6 Door

MODEL		BS DU2F2C/Z	BS DU4C2F/Z	BS DU4F2C/Z
Temperature °C (celcius)	- Chiller - Freezer	+1 to +6 -20 to -14	+1 to +6 -20 to -14	+1 to +6 -20 to -14
External Dimension (mm)		1300 x 770 x 2060	1950 x 770 x 2060	1950 x 770 x 2060
Gross Volume (Litres)	- Chiller - Freezer	540 473	1041 540	540 1041
Voltage/Frequency (V/Hz)		230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	- Chiller - Freezer	522 680	792 680	581 / 522 876
Wattage (W)	- Chiller - Freezer	352 - 389 567 - 627	480 - 530 581 - 642	353 - 390 713 - 788
Ampere (A)	- Chiller - Freezer	2.3 - 2.6 3.6 - 4.0	3.1 - 3.4 3.8 - 4.2	2.4 - 2.6 3.3 - 3.7
Energy Consumption (kw/24h)	- Chiller - Freezer	4.1 - 4.5 10 - 11	6.4 - 7.0 11.6 - 12.8	4.0 - 4.4 14. 4 -16.0
Refrigerant	- Chiller - Freezer	R134a R404a	R134a R404a	R134a R404a
Defrost System		Forced Air Circulation / Electric Heater	Forced Air Circulation / Electric Heater	Forced Air Circulation / Electric Heater
PVC Coated Shelving		8	12	12
Weight (kg)		182	250	266
Unit for 20ft Container		11	7	7
Unit for 40ft Container		23	15	15

Note:
Option : CW - Castor Wheel / BF - Bullet Feet

GASTRONOME UPRIGHT CHILLER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 1FDUC/Z/GN





BS 2FDUC/Z/GN





BS 3FDUC/Z/GN

Top View



Front View



1 Door

2 Door

3 Door

MODEL	BS 1FDUC/Z/GN	BS 2FDUC/Z/GN	BS 3FDUC/Z/GN
Temperature °C (celcius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	680 x 840 x 2060	1350 x 840 x 2060	2020 x 840 x 2060
Gross Volume (Litres)	552	1197	1853
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	646	913	1628
Wattage (W)	361 - 399	539 - 596	803 - 887
Ampere (A)	2.4 - 2.6	3.9 - 4.3	5.4 - 6.0
Refrigerant	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
PVC Coated Shelving	5	10	15
Weight (kg)	130	180	250
Unit for 20ft Container	20	10	6
Unit for 40ft Container	43	21	13

Note:
Standard product can be supplied with either
1. Shelving / Foodpan
2. Castor Wheel / Bullet Feet

GASTRONOME UPRIGHT FREEZER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 1FDUF/Z/GN






BS 2FDUF/Z/GN





BS 3FDUF/Z/GN

Top View



Front View



1 Door

2 Door

3 Door

MODEL	BS 1FDUF/Z/GN	BS 2FDUF/Z/GN	BS 3FDUF/Z/GN
Temperature °C (celcius)	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	680 x 840 x 2060	1350 x 840 x 2060	2020 x 840 x 2060
Gross Volume (Litres)	552	1197	1853
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	772	1112	1526
Wattage (W)	585 - 646	973 - 1075	1364 - 1508
Ampere (A)	2.7 - 3.0	5.1 - 5.6	7.4 - 8.1
Refrigerant	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	5	10	15
Weight (kg)	135	195	260
Unit for 20ft Container	20	10	6
Unit for 40ft Container	43	21	13

Note:
Standard product can be supplied with either
1. Shelving / Foodpan
2. Castor Wheel / Bullet Feet

5 COUNTER RANGE

- Counter Chiller
- Counter Freezer
- Dual Counter Chiller / Freezer
- Pizza Counter
- Salad Sandwich Counter
- 2 Deck Drawer Counter Chiller
- 3 Deck Drawer Counter Chiller
- Refrigerated Barline
- 600 Series / 700 Series



COUNTER CHILLER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2DC4/Z-N






BS 2DC4/Z • BS 2DC5/Z • BS 2DC6/Z





BS 3DC7/Z • BS 3DC8/Z

Top View

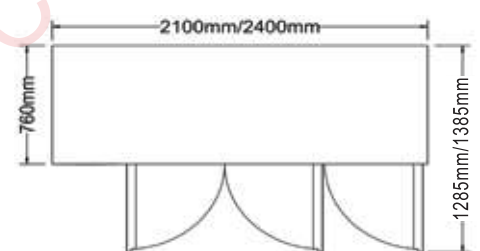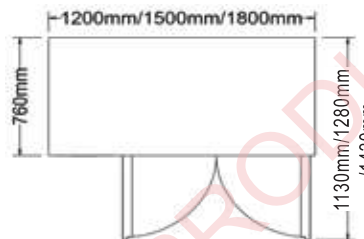

Front View



2 Door-4'

2 Door-4'

2 Door-5'

2 Door-6'

3 Door-7'

3 Door-8'

MODEL	BS 2DC4/Z-N	BS 2DC4/Z	BS 2DC5/Z	BS 2DC6/Z	BS 3DC7/Z	BS 3DC8/Z
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1200 x 760 x 840	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)	233	262	366	472	576	681
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	385	530	530	581	646	646
Wattage (W)	319 - 353	246 - 272	278 - 307	371 - 410	373 - 413	377 - 416
Ampere (A)	2.1 - 2.3	1.6 - 1.8	1.8 - 2.0	2.5 - 2.8	2.5 - 2.7	2.7 - 2.9
Refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Temperature Control	Digital	Digital	Digital	Digital	Digital	Digital
PVC Coated Shelving	4	4	4	4	6	6
Weight (kg)	89	86	98	112	134	146
Unit For 20ft Container	22	22	20	14	14	8
Unit For 40ft Container	46	46	42	28	28	16

*Available on 600 Series and 700 Series

Note:

Option : CW - Castor Wheel / BF - Bullet Feet

COUNTER FREEZER

Magnetic Solid Door • Tested at ambient temperature of 38°C





BS 2DF4/Z • BS 2DF5/Z • BS 2DF6/Z



BS 3DF7/Z • BS 3DF8/Z

Top View

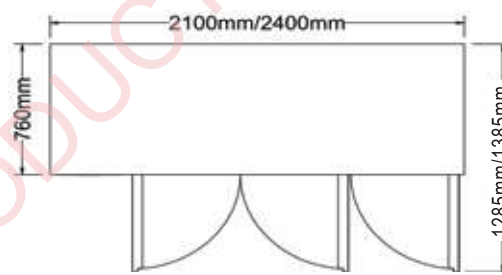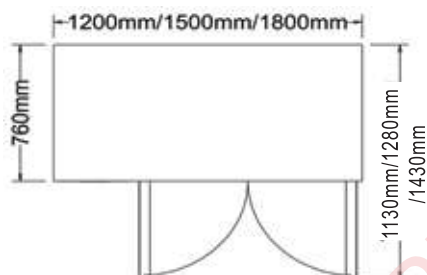

Front View



2 Door-4'

2 Door-5'

2 Door-6'

3 Door-7'

3 Door-8'

MODEL	BS 2DF4/Z	BS 2DF5/Z	BS 2DF6/Z	BS 3DF7/Z	BS 3DF8/Z
Temperature°C (celsius)	-20 to -14	-20 to -14	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)	262	366	472	576	681
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	362	415	415	680	680
Wattage (W)	402 - 444	388 - 429	580 - 641	619 - 684	713 - 787
Ampere (A)	2.7 - 3.0	2.8 - 3.1	3.7 - 4.1	3.9 - 4.3	4.7 - 5.3
Refrigerant	R404a	R404a	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	4	4	4	6	6
Weight (kg)	88	102	116	138	152
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

*Available on 600 Series and 700 Series

Note:

Option : CW - Castor Wheel / BF - Bullet Feet

DUAL COUNTER CHILLER / FREEZER

Magnetic Solid Door • Tested at ambient temperature of 38°C





BS 2DCF4/Z • BS 2DCF5/Z • BS 2DCF6/Z



BS 3D2C1F7/Z • BS 3D2C1F8/Z

Top View

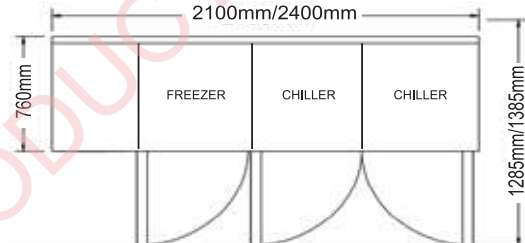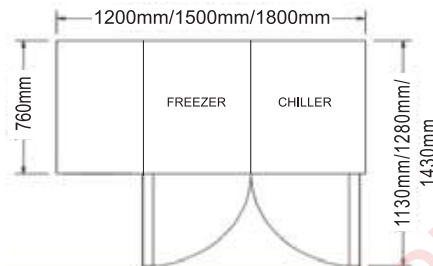

Front View



2 Door-4'

2 Door-5'

2 Door-6'

3 Door-7'

3 Door-8'

MODEL	BS 2DCF4/Z	BS 2DCF5/Z	BS 2DCF6/Z	BS 3D2C1F7/Z	BS 3D2C1F8/Z
Temperature°C (celsius) - Chiller - Freezer	+1 to +6 -20 to -14	+1 to +6 -20 to -14	+1 to +6 -20 to -14	+1 to +6 -20 to -14	+1 to +6 -20 to -14
External Dimension (mm)	1200 x 760 x 840	1500 x 760 x 840	1800 x 760 x 840	2100 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres) - (left) Freezer - (right) Chiller	127 127	178 178	230 230	183 375	224 445
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	362	415	415	680	680
Wattage (W)	371 - 409	418 - 462	456 - 504	462 - 510	474 - 522
Ampere (A)	2.5 - 2.7	2.8 - 3.2	3.0 - 3.4	3.1 - 3.5	3.3 - 3.7
Refrigerant	R404a	R404a	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater	Electric Heater	Electric Heater
PVC Coated Shelving	4	4	4	6	6
Weight (kg)	88	107	119	141	151
Unit For 20ft Container	22	20	14	14	8
Unit For 40ft Container	46	42	28	28	16

Note:

Option : CW - Castor Wheel / BF - Bullet Feet

PIZZA COUNTER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 1D/PCF4/Z






BS 2D/PCF6/Z






BS 3D/PCF8/Z

Top View

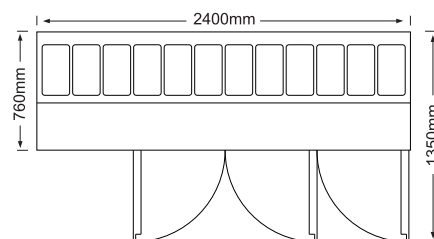

Front View

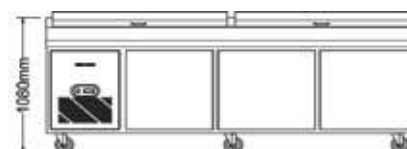

MODEL	BS 1D/PCF4/Z	BS 2D/PCF6/Z	BS 3D/PCF8/Z
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1200 x 760 x 1080	1800 x 760 x 1080	2400 x 760 x 1080
Gross Volume (Litres)	216	426	634
Voltage/Frequency (V/ Hz)	230V/1/50HZ 220V/1/60HZ	230V/1/50HZ 220V/1/60HZ	230V/1/50HZ 220V/1/60HZ
Cooling Capacity (W)	415	680	772
Wattage (W)	380 - 420	456 - 504	513 - 567
Ampere (A)	2.6 - 3.0	3.4 - 3.8	3.7 - 4.1
Refrigerant	R404a	R404a	R404a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
No. of 1/3 Size Pan (Depth 100mm)	6	8	12
PVC Coated Shelving	2	4	6
Weight (kg)	119	156	196
Unit For 20ft Container	11	7	4
Unit For 40ft Container	23	14	8

Note:

1. Width : 305mm for chopping board
2. Chopping Board exclusive

SALAD SANDWICH COUNTER

Magnetic Solid Door • Tested at ambient temperature of 38°C



BS 2D/SSCF/Z-N



BS 1D/SSCF4/Z







BS 2D/SSCF6/Z






BS 3D/SSCF8/Z

Top View

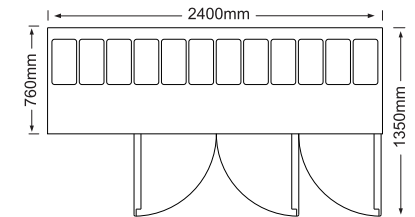

Front View



MODEL	BS 2D/SSCF/Z-N	BS 1D/SSCF4/Z	BS 2D/SSCF6/Z	BS 3D/SSCF8/Z
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	825 x 760 x 840	1200 x 760 x 840	1800 x 760 x 840	2400 x 760 x 840
Gross Volume (Litres)	131	216	426	634
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	385	646	792	913
Wattage (W)	346 - 382	361 - 399	475 - 525	570 - 630
Ampere (A)	2.2 - 2.5	2.4 - 2.6	3.3 - 3.7	4.2 - 4.6
Refrigerant	R134a	R404a	R404a	R404a
No. of 1/3 Size Pan (Depth 100mm)		6	9	12
No. of 1/6 Size Pan (Depth 65mm)	4			
No. of 1/9 Size Pan (Depth 65mm)	10			
PVC Coated Shelving	4	2	4	6
Weight (kg)	89	109	143	180
Unit For 20ft Container	12	22	14	8
Unit For 40ft Container	26	46	28	16

2 DECK DRAWER COUNTER CHILLER

Tested at ambient temperature of 38°C



BS 2DR/C1165/2






BS 4DR/C1850/2






BS 6DR/C2535/2

Top View

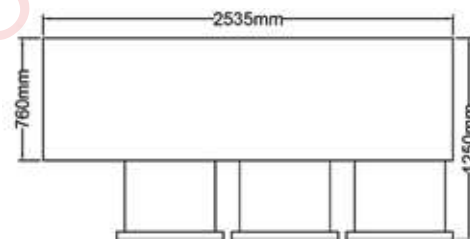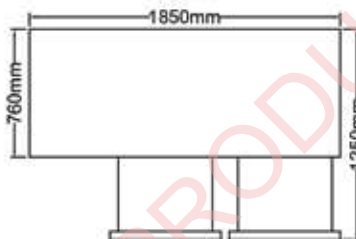

Front View

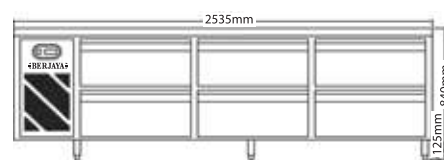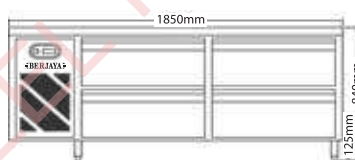

2 Deck

2 Drawer

4 Drawer

6 Drawer

MODEL	BS 2DR/C1165/2	BS 4DR/C1850/2	BS 6DR/C2535/2
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1165 x 760 x 840	1850 x 760 x 840	2535 x 760 x 840
Gross Volume (Litres)	279	536	795
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	712	1014	1113
Wattage (W)	361 - 399	503 - 557	513 - 567
Ampere (A)	2.5 - 2.7	3.2 - 3.6	3.3 - 3.6
Refrigerant	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Number of Drawer	2	4	6
No. of 1/1 Size Pan (Depth 150mm)	4	8	12
Weight (kg)	98	140	194
Unit For 20ft Container	20	12	8
Unit For 40ft Container	44	26	16

Note:
Option : CW - Castor Wheel / BF - Bullet Feet

3 DECK DRAWER COUNTER CHILLER

Tested at ambient temperature of 38°C



BS 3DR/C1165/3






BS 6DR/C1850/3






BS 9DR/C2535/3

Top View

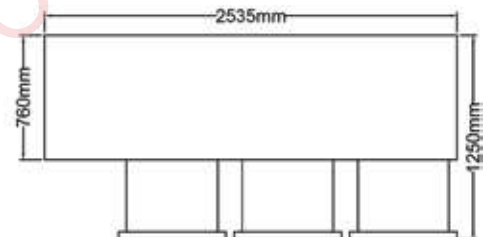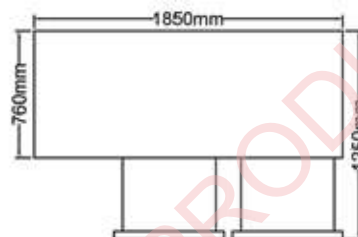

Front View

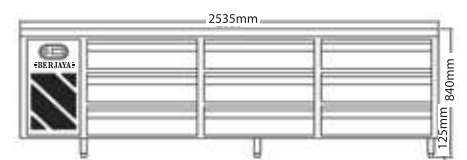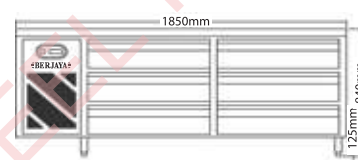

3 Deck

3 Drawer

6 Drawer

9 Drawer


MODEL	BS 3DR/C1165/3	BS 6DR/C1850/3	BS 9DR/C2535/3
Temperature°C (celsius)	+1 to +6	+1 to +6	+1 to +6
External Dimension (mm)	1165 x 760 x 840	1850 x 760 x 840	2535 x 760 x 840
Gross Volume (Litres)	279	536	795
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	712	1014	1114
Wattage (W)	361 - 399	503 - 557	522 - 578
Ampere (A)	2.5 - 2.7	3.2 - 3.5	3.3 - 3.7
Refrigerant	R134a	R134a	R134a
Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Number of Drawer	3	6	9
No. of 1/1 Size Pan (Depth 65mm)	6	12	18
Weight (kg)	125	197	219.5
Unit For 20ft Container	20	12	8
Unit For 40ft Container	44	26	16

Note:

Option : CW - Castor Wheel / BF - Bullet Feet

REFRIGERATED BARLINE 600/700 Series

Heated Glass , Frost Free • Tested at ambient temperature of 32°C

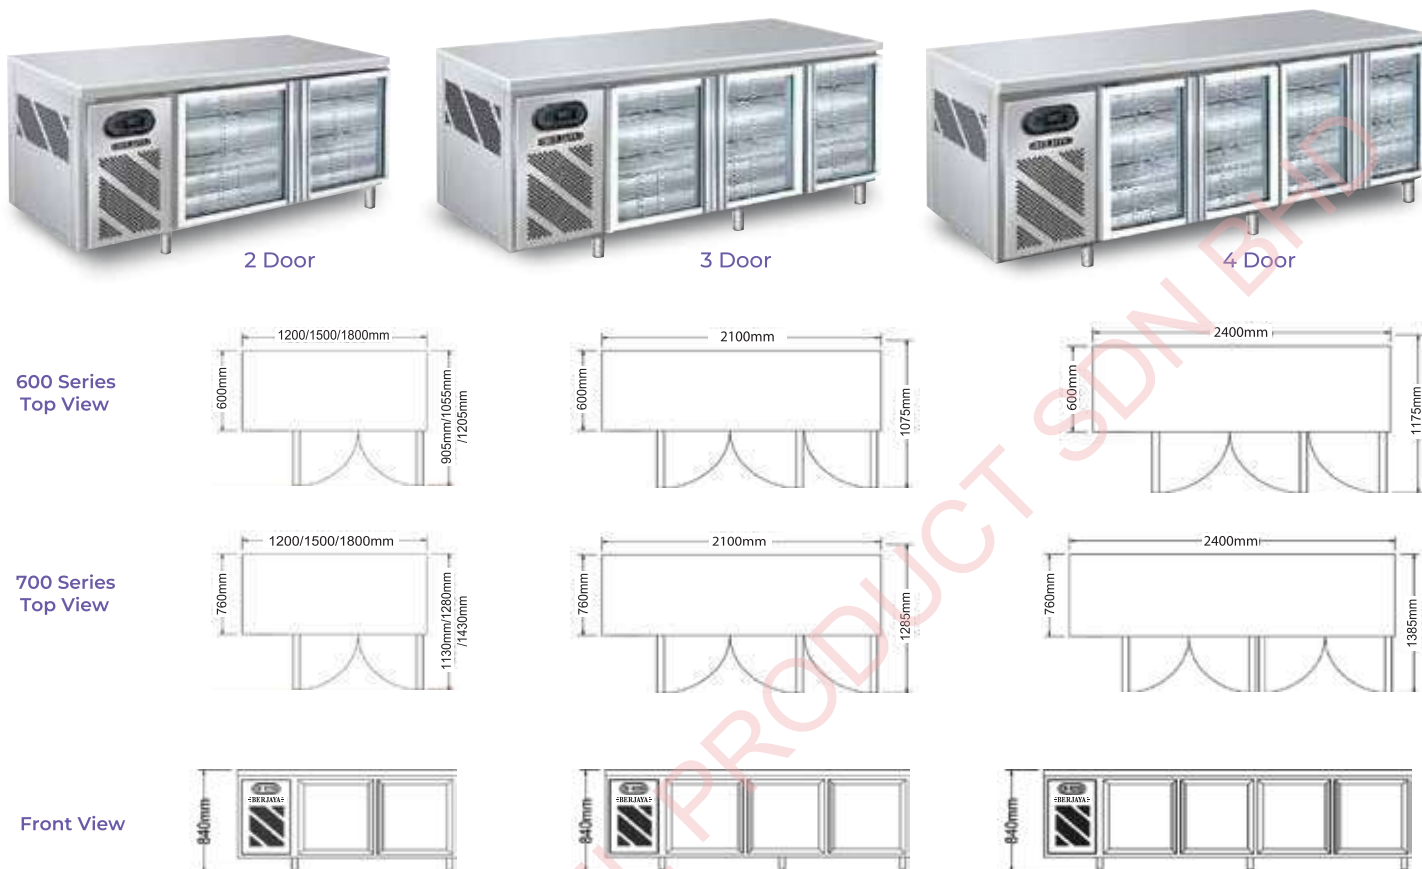


				2 Door		2 Door		2 Door		3 Door		4 Door	
MODEL	600 Series	B2D/C4/600-SM		B2D/C5/600-SM		B2D/C6/600-SM		B3D/C7/600-SM		B4D/C8/600-SM			
	700 Series	B2D/C4/7-SM		B2D/C5/7-SM		B2D/C6/7-SM		B3D/C7/7-SM		B4D/C8/7-SM			
Temperature°C		+1 to +6		+1 to +6		+1 to +6		+1 to +6		+1 to +6			
External Dim.(mm)	- 600 Series	1200 x (600 + 20) x 840		1500 x (600 + 20) x 840		1800 x (600 + 20) x 840		2100 x (600 + 20) x 840		2400 x (600 + 20) x 840			
	- 700 Series	1200 x (760 + 20) x 840		1500 x (760 + 20) x 840		1800 x (760 + 20) x 840		2100 x (760 + 20) x 840		2400 x (760 + 20) x 840			
Gross Volume (Litres)	- 600 Series	182		255		329		405		479			
	- 700 Series	263		366		472		576		681			
Voltage/ Frequency (V/ Hz)		230V/1/50HZ 220V/1/60HZ		230V/1/50HZ 220V/1/60HZ		230V/1/50HZ 220V/1/60HZ		230V/1/50HZ 220V/1/60HZ		230V/1/50HZ 220V/1/60HZ			
Cooling Capacity (W)		639		750		750		977		1316			
Wattage (W)	- 600 Series	326 - 361		440 - 486		402 - 444		511 - 565		558 - 616			
	- 700 Series	333 - 353		411 - 454		474 - 524		451 - 499		570 - 604			
Ampere (A)	- 600 Series	1.90 - 2.10		2.60 - 2.90		2.40 - 2.60		3.10 - 3.40		3.29 - 3.64			
	- 700 Series	1.94 - 2.06		2.40 - 2.70		2.70 - 3.0		2.90 - 3.20		3.37 - 3.57			
Refrigerant		R134a		R134a		R134a		R134a		R134a			
Defrost System		Forced Air Circulation		Forced Air Circulation		Forced Air Circulation		Forced Air Circulation		Forced Air Circulation			
PVC Coated Shelving		4		4		4		6		8			
Weight (kg)	- 600 Series	77		80.7		89.8		110.3		125.6			
	- 700 Series	97		107		117		143		158			
Unit For 20ft Container	- 600 Series	24		22		16		16		8			
	- 700 Series	22		22		14		14		8			
Unit For 40ft Container	- 600 Series	50		46		32		32		16			
	- 700 Series	46		42		28		28		16			


Note:
Option : CW - Castor Wheel / BF - Bullet Feet

TABLE TOP DISPLAY COOLER

Ventilated System • Double Curved Glass • Tested at ambient temperature of 29°C



Front View




Side View


MODEL	DC 211	DC 311	DC 211	DC 311
Temperature °C (celcius)	+1 to +6	+1 to +6	1.9 - 2.1	2.5 - 2.8
External Dimension (mm)	750 x 740 x 590	1095 x 740 x 590	R134a	R134a
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	Forced Air Circulation	Forced Air Circulation
Cooling Capacity (W)	639	712	50	75
Wattage (W)	290 - 320	391 - 432	Unit for 20ft Container	Unit for 40ft Container
			36	30
			72	63

MINI DISPLAY CHILLER

Non heated glass • Tested at ambient temperature of 32°C



Top View



Front View


1 Door

MODEL	1D/MDC-SM	Energy Consumption (kw/24h)	5.1 - 5.7
Temperature °C (celcius)	+1 to +6	Refrigerant	R134a
External Dimension (mm)	590 x (580 + 20) x 1740	PVC Coated Shelving	5
Gross Volume (Litres)	292	Auto Door Lock	No
Voltage/Frequency (V/Hz)	230V/1/50Hz • 220V/1/60Hz	Weight (kg)	75
Cooling Capacity (W)	439	Unit for 20ft Container	27
Wattage (W)	238 - 263	Unit for 40ft Container	57
Ampere (A)	1.6 - 1.7		


Note:
Colour of Door Frame : SM - Silver Matt Aluminium Frame

FISH DISPLAY CASE

Static Cooling System • Front Hardened Glass • Tested at ambient temperature of 32°C

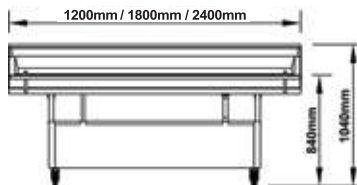

Front View



Side View




MODEL	FDC 4	FDC 6	FDC 8		FDC 4	FDC 6	FDC 8
Temperature °C (celcius)	+1 to +6	+1 to +6	+1 to +6	Ampere (A)	2.5 - 2.7	3.4 - 3.8	4.3 - 4.7
External Dimension (mm)	1200x 1160 x 1110	1800 x 1160 x 1110	2400 x 1160 x 1110	Refrigerant	R134a	R134a	R134a
Gross Volume (Litres)	97	148	200	Defrost System	Manual	Manual	Manual
Voltage/Frequency (V/Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	Weight (kg)	107	133	165
Cooling Capacity (W)	646	913	1628	Unit for 20ft Container	8	6	4
Wattage (W)	428 - 472	475 - 525	922 - 1018	Unit for 40ft Container	18	12	8

Note:


Fish and crushed ice are to be collected and put into separate freezer or polystyrene box, at the end of daily sales.

REFRIGERATED DISPLAY CASE

Ventilated System • Tested at ambient temperature of 28°C

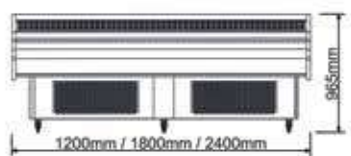

Front View



Side View

MODEL	RDC 4	RDC 6	RDC 8		RDC 4	RDC 6	RDC 8
Temperature °C (celcius)	+2 to +10	+2 to +10	+2 to +10	Refrigerant	R404a	R404a	R404a
External Dimension (mm)	1200x 1100 x 965	1800 x 1100 x 965	2400 x 1100 x 965	Defrost System	Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Gross Volume (Litres)	388	596	804	Weight (kg)	160	215	260
Voltage/Frequency (V/Hz)	230V/1/50Hz	230V/1/50Hz	230V/1/50Hz	Unit for 20ft Container	8	6	4
Cooling Capacity (W)	3422	3736	4896	Unit for 40ft Container	18	12	8
Wattage (W)	1330 - 1470	1473 - 1627	1758 - 1942				
Ampere (A)	7.1 - 7.9	8.0 - 8.8	8.8 - 9.8				

OPEN SHOWCASE


Ventilated System • Leaned and movable shelves • Self Contained Type •
With night blinds for energy saving • Tested at ambient temperature of 28°C





BS-OS 4SC-2W • BS-OS 6SC-2W • BS-OS 8SC-2W




BS-OS 4SC-2B • BS-OS 6SC-2B • BS-OS 8SC-2B



Front View

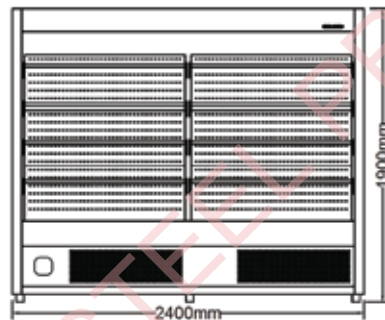

Side View



Air Flow Circulation

MODEL	White Body	BS-OS 4SC-2W	BS-OS 6SC-2W	BS-OS 8SC-2W
	Black Body	BS-OS 4SC-2B	BS-OS 6SC-2B	BS-OS 8SC-2B
Temperature °C (celcius)		+2 to +10	+2 to +10	+2 to +10
External Dimension (mm)		1200 x 800 x 1900	1800 x 800 x 1900	2400 x 800 x 1900
Gross Volume (Litres)		724	1119	1145
Voltage/Frequency (V/Hz)		230V/1/50Hz	230V/1/50Hz	230V/1/50Hz
Cooling Capacity (W)		3736	4896	3957 x 2
Wattage (W)		1235 - 1365	1782 - 1969	2770 - 2778
Ampere (A)		6.3 - 6.9	8.3 - 9.2	13.27 - 13.5
Refrigerant		R404a	R404a	R404a
Defrost System		Forced Air Circulation	Forced Air Circulation	Forced Air Circulation
Weight (kg)		202	334	-
Unit for 20ft Container		11	7	4
Unit for 40ft Container		23	14	8



BERJAYA STEEL PRODUCT SDN. BHD.

(Company No: 301440-W)

OFFICE : 191-5, 5th Floor, Wisma CKE,
Jalan Lancang Off Jalan Cheras,
56100 Kuala Lumpur, Malaysia.

FACTORY : PT 16736, Jalan Permata 1,
Arab Malaysian Industrial Park,
71800 Nilai, Negeri Sembilan, Malaysia.

HUNTING LINE: +603 - 9145 8888

TELEPHONE : +603 - 9130 1213

FAX : +603 - 9130 1226

EMAIL : export@berjayasteel.com

www.berjayasteel.com

As Product improvement is an on going process,
we reserve the right to change specifications or design without notice.

Refrigerator/REV 18/2023/8